



## PR402DR-SET

PR402DR-SET consist of PR402DR access controller and PS-10ACDR (18VA) power transformer factory pre-installed in metal enclosure with place for 7Ah/12V back-up battery. Metal enclosure is equipped with tamper contact and offers status LED window.



\* The battery shown in the photo is not included in the PR402DR-SET.


## Features:

- Complete solution. The kit contains all (apart from readers) devices needed to build fully functional access control point
- Possibility of ceiling mounting
- Direct view to access controller state thanks to window in the enclosure
- Esthetical metal enclosure
- Quick and easy installation thanks to enclosed accessories

## Set includes:

- PR402DR access controller in DIN rail enclosure
- Master card
- Set of jumpers for addressing the controller
- Power transformer PS-10ACDR
- Metal enclosure with window, tamper switch, DIN rail (35mm)
- Mounting screws
- Back-up battery connection and fastening accessories
- Instruction manuals

## View and dimensions:

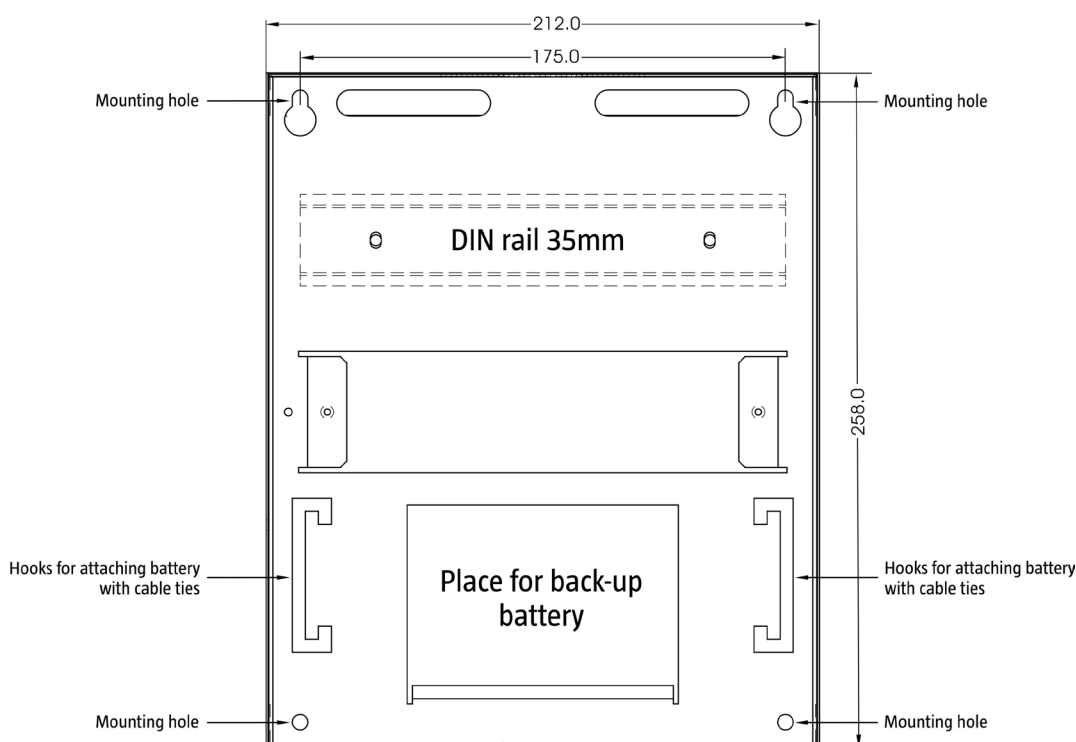

Available versions and symbols	
Symbol	Description
<b>PR402DR-SET</b>	Standard version

Technical Specification	
Parameter	Value
<b>Supply voltage</b>	230VAC (+/- 15%), 50Hz
<b>Tamper switch</b>	30VDC/0,5A
<b>Place for battery</b>	7Ah/12V; sealed lead-acid battery (SLA)
<b>Closing</b>	Two screws in front of the enclosure
<b>Environmental class</b>	Class I, indoor conditions, temp.: +5°C - +40°C, relative humidity: 10 - 95% (no condensation)
<b>Dimensions H x W x D</b>	212 x 258 x 73mm
<b>Weight</b>	≈2250g
<b>Certificates</b>	CE