

radius



PRT64LT

Each PRT64LT reader can be used as an universal identification point connected to the access controller.


PRT64LT readers can operate in many common communication standards (e.g. Wiegand, Magstripe, Clock and Data, RACS), so they can cooperate with majority of controllers from different vendors available on the market.



Features:

- EM 125 kHz cards
- Programmable data output format
- Formats: Wiegand 26-66 bits, Magstripe (Clock and data), RACS (Roger) and other
- Various ways of PIN and keypad codes transmission
- LED and Buzzer controlled through separate inputs
- Tamper
- CE mark

PRT64LT views and installation diagram

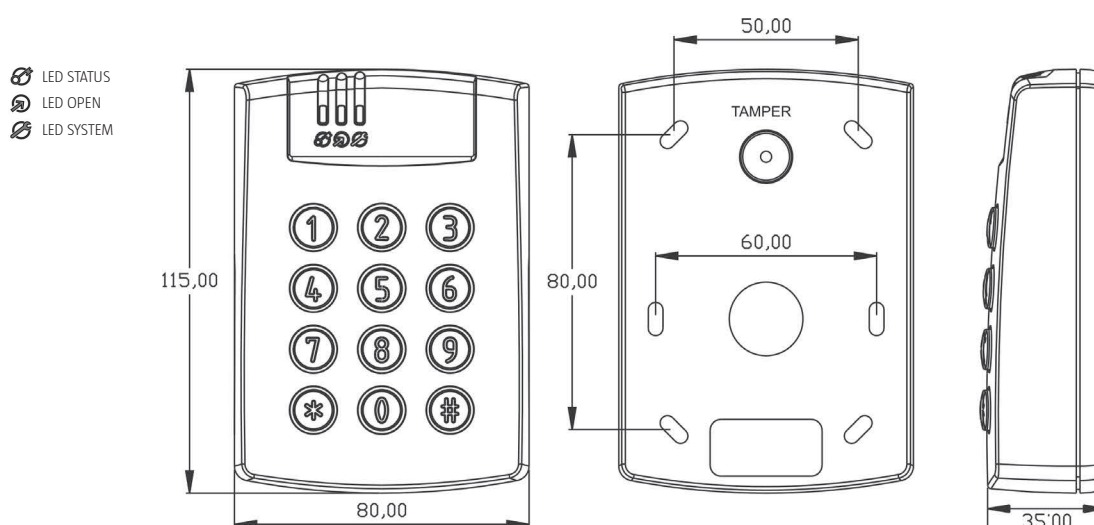

Available versions and symbols	
Symbol	Description
PRT64LT-G	Dark grey case
PRT64LT-S	Silver-metallic case

Technical Specification	
Parameter	Value
Supply voltage	10-15 VDC
Current consumption (average)	65mA
Anti-sabotage protection (Tamper)	NC contact, 50mA/24V, IP67
Reading distance	Up to 15 cm
Environmental class	Class IV, outdoor-general, temperature: -25°C - +60°C, relative humidity: 10 to 95% (non condensing)
Dimensions H x W x D	115 X 80 X 35 mm
Weight	≈120g
Approvals	CE

ROGER sp.j
Gościszewo 59
82-400 Sztum
Poland

T. +48 55 272 0132
F. +48 55 272 0133
E. roger@roger.pl
I. www.roger.pl

roger®